

ELKAY[®]

SPECIFICATIONS

EZH20™ – In-Wall Recessed Bottle Filling Station

Models EZWSM8PK & EZWSMDPK
(For use with non-refrigerated SwirlFlo[®] fountains)

PRODUCT FEATURES

- Designed specifically for use with non-refrigerated SwirlFlo[®] fountains
- Space saving ADA-compliant design
- Sanitary, no-touch, sensor activation with automatic 20-second shut-off timer
- Silver ion anti-microbial protection
- Quick fill rate is 1 gpm for refrigerated units and 1.5 gpm for non-refrigerated units
- Visual user interface display includes:
 - Green Ticker counts the quantity of bottles saved from the landfill
- Includes mounting frame for quick and simple installation
- Hinged door for easy servicing
- Constructed of durable 18 gauge stainless steel and ABS plastic

Model EZWSM8PK provides 8.0 gph of 50° F water at 90° F ambient and 80° F inlet water. Model EZWSMDPK is non-refrigerated and provides ambient water. Shall be recessed design and constructed of 18 gauge Type 300 series stainless steel and ABS plastic. Shall include electronic sensor for no-touch activation with automatic 20-second shut-off timer. Shall provide 1-1.5 gpm flow rate with laminar flow to minimize splashing. Shall include antimicrobial protected plastic components to prevent mold and mildew. Shall meet ADA guidelines for reach ranges, when properly installed. Shall be lead-free design which meets Safe Drinking Water Act and is certified to NSF/ANSI 61 and California AB1953. Unit shall be certified to UL399 and CAN/CSA 22.2 No. 120.

SUGGESTED SPECIFICATIONS


2222 Camden Court Phone: 630-572-3192
Oak Brook, IL 60523 Web: Elkayusa.com



Third Party Certified to:

- UL399 and CAN/CSA 22.2 No. 120
- Lead-free compliance including NSF/ANSI 61 and CA AB1953

IMAGES

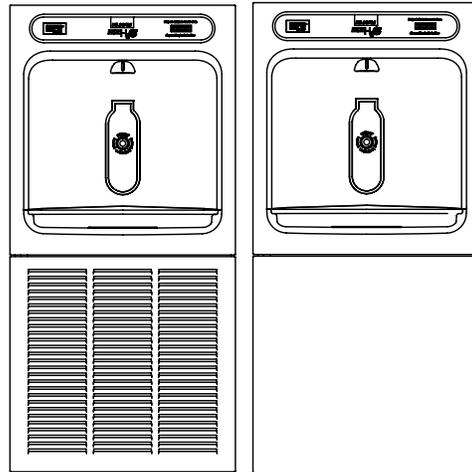

Model EZWSM8PK
(refrigerated)

Model EZWSMDPK
(non-refrigerated)

- 36292C Receptacle Adaptor Plug


OPTIONAL ACCESSORIES

Designed for pairing with non-refrigerated SwirlFlo[®] fountains (EDFPB models) in:

- Educational facilities
- Healthcare facilities
- Sport and fitness centers
- Airports
- Office buildings
- Other commercial buildings


APPLICATIONS

ROUGH-IN DIMENSIONS

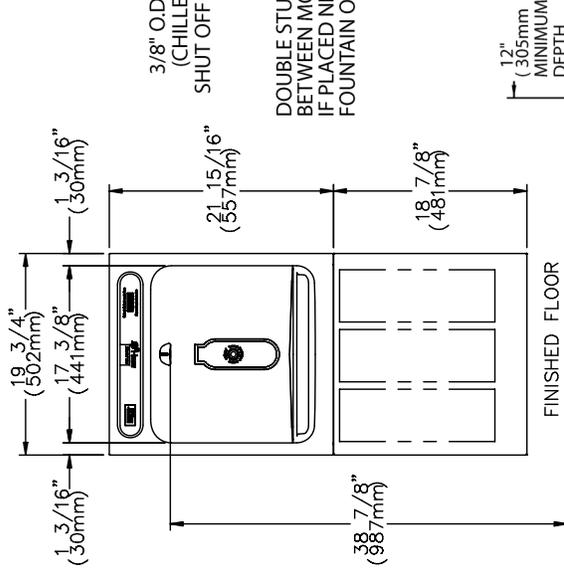

***NOTE**
These models are designed for use with EDFPB fountains.

ELECTRICAL
EZH2O Station equipped with electric cord and three-prong molded rubber plug for use with 15-amp minimum receptacle. In the cooling unit, a junction box for a (3) wire, 10-amp branch circuit is provided. Rated at 115 volt, 60 Hz, single phase.

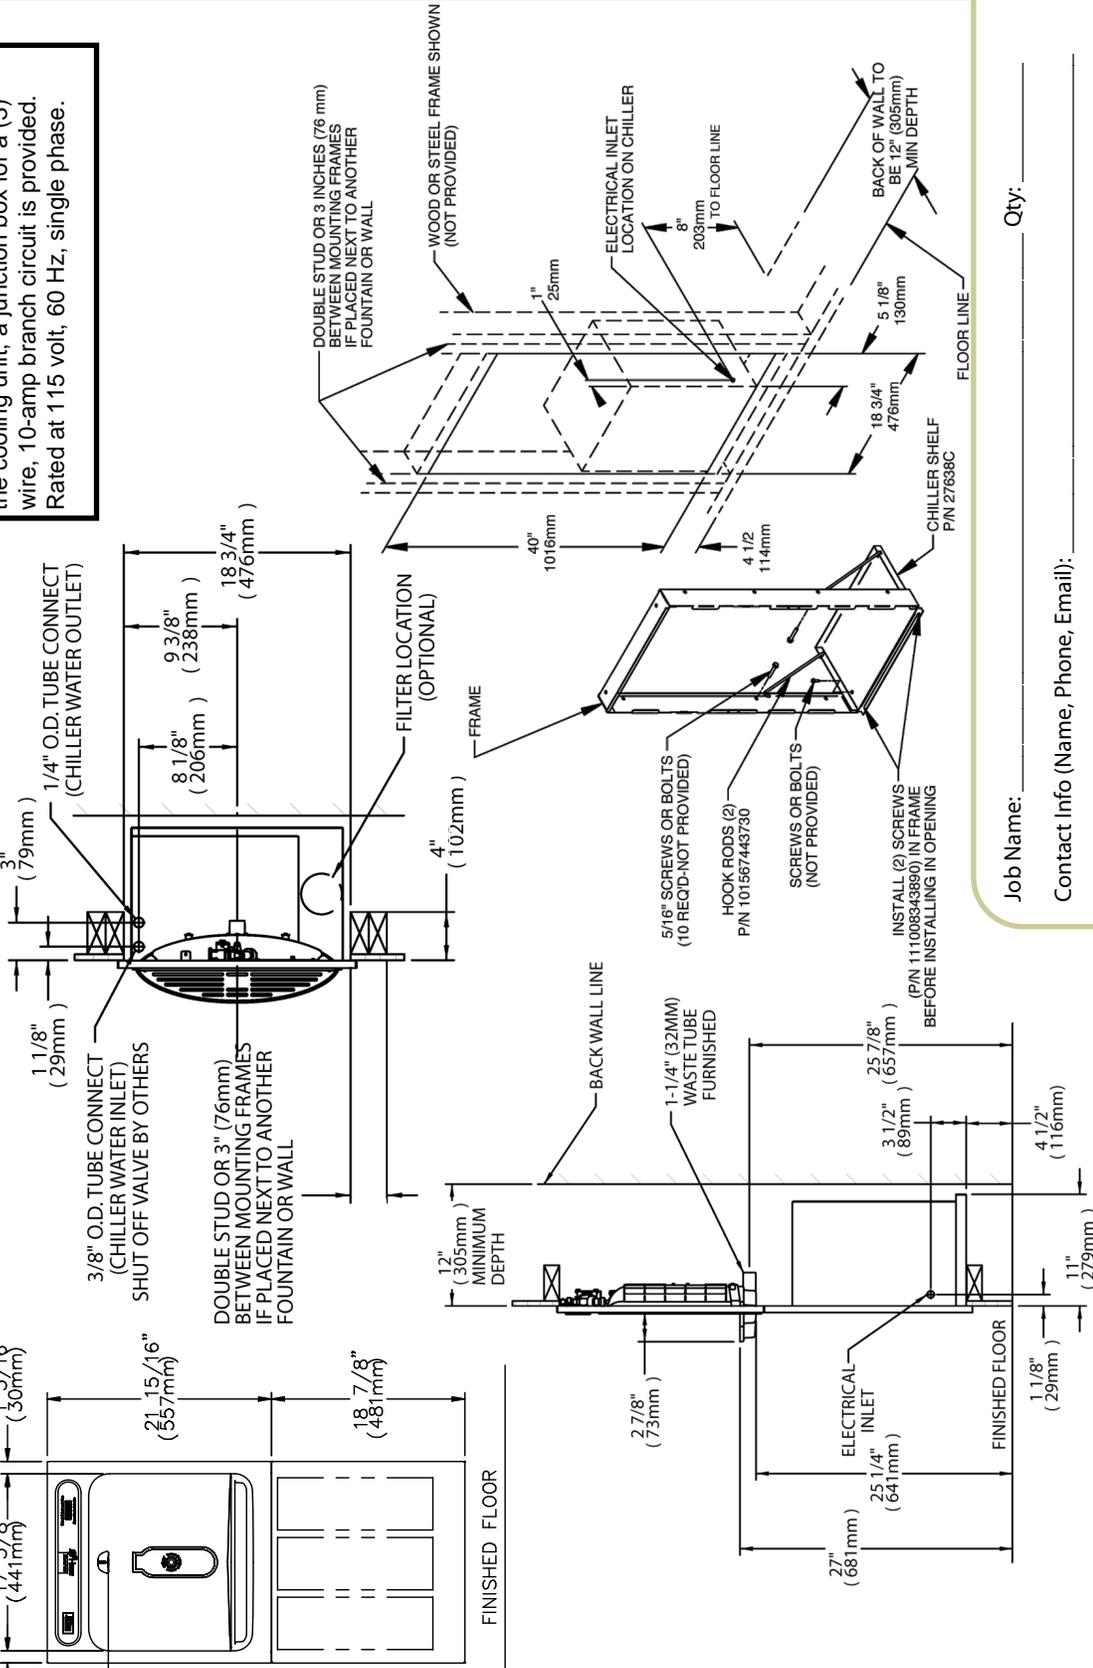

Job Name: _____ Qty: _____

Contact Info (Name, Phone, Email): _____

Approval for Manufacture — Signature and Date: _____

Comments: _____

2222 Camden Court
Oak Brook, IL 60523
Phone: 630 -572-3192
Web: Elkayusa.com

Specifications and measurements are subject to change without notification.
Please visit elkayusa.com for most current version.