

MODEL OVL-II™ E



This fountain is certified to **NSF/ANSI 61.**

GENERAL

Oval shape face-mounted fountain, one-piece, non-corrosive stainless steel with brushed satin finish. Contour-formed basin with rounded corners and edges reduces splatter, insures proper drainage and prevents standing waste water. Oval fountain shape requires less neck extension and bending for the wheel chair user. Designed to be easily accessible to both physically challenged and able-bodied individuals. Ideally suited for installation in public areas. Model meets state and federal requirements as defined by the Americans with Disabilities Act.

BUBBLER

Exclusive one-piece, chrome-plated two-stream mound-building bubbler with non-removable anti-squirt feature and integral hood insures a satisfying drink of water.

PUSH BAR ACTUATION MECHANISM

Self-closing, semi-circular push bar can be actuated at any point of its 180° radius.

AUTOMATIC STREAM HEIGHT REGULATOR

Self-closing assembly is located inside unit to prevent tampering. Unit resists corrosion and liming. A constant stream height is automatically maintained under line pressures that vary from 20 to 105 psi.

INLET STRAINER

Easily cleaned in-line strainer screen traps particles of 140 microns or larger before they enter the waterway.

WATER INLET

3/8" O.D. Tubing

DRAIN OUTLET

1-1/4" tube outlet for 1-1/4" slip joint connection.

SUGGESTED SPECIFICATIONS

Fountain shall include pushbar on the front. Shall include contour-formed basin to eliminate splashing and standing water, and shall have rounded corners and edges. Projector shall be two-stream, mound-building type with integral hood guard and anti-squirt feature. Fountain shall comply with ANSI 117:1 and ADA for visual and motion disabilities. The manufacturer shall certify the unit to meet the requirements of NSF/ANSI 61, and the Safe Drinking Water Act.

Note: Continued product improvement makes specifications subject to change without notice. See Halsey Taylor website for most current spec sheet.

OVL-II™



Standard Finish is Stainless Steel

Optional Finishes (extra cost)
Aztec Gold
☐ Galaxy Gray Marblyte [™] (Bowl Only)
☐ Black Onyx Marblyte [™] (Bowl Only)
Optional Accessories (extra cost)
☐ Vandal-Resistant Kit
☐ Easy-Flex [™] Bubbler
☐ Water Filter
Each OVL-II™ E consists of 1 carton of the following:
Fountain and Misc. Parts
Trap and service stop not included.
Shipping weight: 18 lbs.

JOB NAME:
ENGINEER/CONTRACTOR NAME:
APPROVAL:
DATE:







OVL-II™ E

OVL-II™ Barrier-Free Face-Mounted Fountain

(CONTINUED)

MOUNTING INSTRUCTIONS

Refer to diagrams for rough-in of plumbing. For wall support required locations see installation instructions provided with fountain. Water service line and waste line are to be assembled as required. Final check for leaks and correct functions of fountain should be made. (For details see the installation instructions.)


Installation requires trap to be installed in wall. A service supply stop must be installed at the fountain inlet line. Trap and service stop not included.

CAUTION – Fountain must be securely bolted to wall.


OPERATING PRESSURES:

Supply water - 105 psi maximum

FRONT VIEW

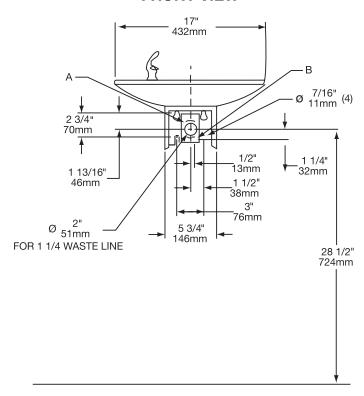

SIDE VIEW

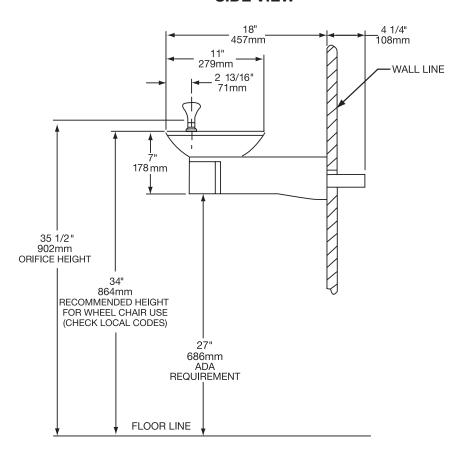

*ADA Requirement

1-1/4" Trap and elbow not provided.

Halsey Taylor.

A = 1 1/4" O.D. WASTE TUBE (TRAP & ELBOW NOT PROVIDED) B = 3/8" O.D. UNPLATED COPPER TUBE CONNECT (WATER INLET)