## Elkay Outdoor Fountain Pedestal with Pet Station Non-Filtered Non-Refrigerated

Model LK4400DB

## **PRODUCT SPECIFICATIONS**

Elkay Outdoor Fountain Pedestal with Pet Station Non-Filtered, Non-Refrigerated. Features shall include 316 Stainless, Heavy Duty Vandal-Resistant, Pet Fountain. Furnished with Vandal-Resistant bubbler. Mechanical Front Bubbler Button activation. Product shall be Floor Mount/Freestanding, for Outdoor applications, serving 2 station(s). Unit shall be lead-free design which is certified to NSF/ANSI 61 & 372 (lead free) and meets Federal and State low-lead requirements.

| Special Features:        | 316 Stainless, Heavy Duty Vandal- |
|--------------------------|-----------------------------------|
|                          | Resistant, Pet Fountain           |
| Finish:                  | Beige (BGE), Black (BLK),         |
|                          | Blue (BLU), Brown (BRN),          |
|                          | Evergreen (EVG), Gray (GRY),      |
|                          | Orange (ORN), Purple (PUR),       |
|                          | Red (RED), Terracotta (TER),      |
|                          | White (WHT), Yellow (YLW)         |
| Power:                   | No Electrical Required            |
| Bubbler Style:           | Vandal-Resistant                  |
| Activation by:           | Mechanical Front Bubbler Button   |
| Mounting Type:           | Floor Mount/Freestanding          |
| Chilling Option:         | Non-Refrigerated                  |
| Full Load Amps           | 0                                 |
| Dimensions (L x W x H):  | 26" x 14" x 40-5/16"              |
| Approx. Shipping Weight: | 157 lbs.                          |
| Installation Location:   | Outdoor                           |
| No. of Stations Served:  | 2                                 |

- Mechanically-Activated bubbler continues to supply water in event of service disruptions.
- Base material constructed from marine-grade 316 stainless steel provides the ultimate corrosion protection from even the most corrosive elements.
- Heavy Duty Vandal-Resistant:
  - Tamper resistant screws
  - Resists stains and corrosion
  - Heavy-gauge construction
- Vandal-resistant, bubblers are one-piece, chrome plated with integral hood guard design to prevent contamination from other users, airborne deposits and tampering.
- · Pet Fountain: Features slow drainage for easy drinking.



#### AMERICAN PRIDE. A LIFETIME TRADITION.

Like your family, the Elkay family has values and traditions that endure. For almost a century, Elkay has been a family-owned and operated company, providing thousands of jobs that support our families and communities.



Included with Product: Outdoor Fountain

## PRODUCT COMPLIANCE

Buy American Act NSF/ANSI 61 & 372 (lead free)



Installation Instructions (PDF)

Warranty pertains to drinking water applications only. Nondrinking water applications are not covered under warranty. Warranty (PDF)

### **OPTIONAL ACCESSORIES**

| LK4471LHB - Locking Hose Bib             |
|--|
| 97890C - Accessory - Direct Bury Adaptor |
| LK4470NLHB - Hose Bib                    |

| PART:     | QTY: |
|-----------|------|
| PROJECT:  |      |
| CONTACT:  |      |
| DATE:     |      |
| NOTES:    |      |
| APPROVAL: |      |

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkay.com for the most current version of Elkay product specification sheets. This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.

# MOUNTING INSTRUCTIONS and PLUMBING CONNECTIONS

Refer to diagrams for plumbing rough-in. This fountain is to be mounted on a smooth, flat finished wall surface with adequate support.

Note: Wall mounting structure must be capable of supporting 300lb. load minimum on fountain. To secure unit, use 3/8 minimum fasteners (not provided). Water service line and waste line are to be assmbled as required. Final check for leaks and correct functions of fountain should be made. (For details see the installation instructions.)


Installation requires trap to be installed in wall. A service supply stop must be installed at the fountain inlet line. Trap and service stop not included.

Caution - Fountain must be securely bolted to wall.

**Note:** For wall support required locations see installation instructions provided with fountain.

### **OPERATING PRESSURES:** Supply water 20 – 105 psi maximum

### **TOP VIEW**

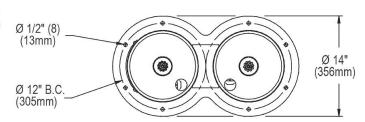

### SIDE & FRONT VIEWS

## **BACK VIEW** Ø 10" (254mm) 2-3/8" 22" (61mm) (559mm) 0 0 В 40-5/16" (1025mm) 30" (762mm) 41-11/16" (1058mm) 12" В (305mm) 6-9/16" (167mm) 8" (203mm)

A = 3/8" O.D. UNPLATED COPPER TUBE CONNECT SHUT OFF VALVE BY OTHERS B = ACCESS PANEL (8" x 10")

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkay.com for the most current version of Elkay product specification sheets. This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.