


## Filter Replacement in 1200 Series Models

Water does not need to be shut off to replace the filter cartridge; however, it should be shut off if the filter head is going to be left without a cartridge installed for a long period of time.

Take care not to damage the circuit board located near the filter head during the following steps.

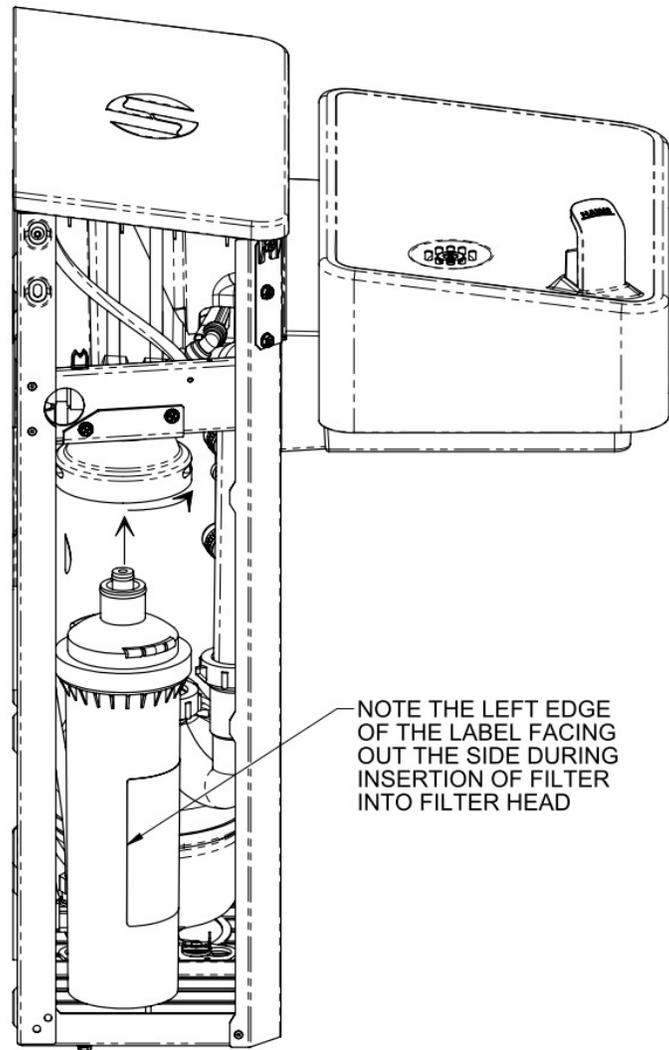

1. Unbolt and remove the cooler skirt.
2. To remove the old filter, turn about  $\frac{1}{4}$  turn clockwise (as viewed from above) and pull down. A small amount of water will drip out.
3. Install the new filter by pushing up and turning counterclockwise. Note the label orientation in figure.
4. Carefully reinstall the skirt.
5. Run one of the bubblers for 10 minutes to properly flush the filter. Flow may splatter until air is purged from system.
6. Check system for leaks.