



# Water Coolers

## AQUA POINTE SERIES SPORTS BOTTLE FILLER

### MWSBF, MW8SBF, MW12SBF

#### Suggested Specification

Model MW8SBF shall deliver 8.0 gph of 50°F water at 90°F ambient and 80°F inlet water. Model MW12SBF shall deliver 12.0 gph of 50°F water at 90°F ambient and 80°F inlet water. Model MWSBF is a non-refrigerated Bottle Filler and delivers ambient water. Basin shall be designed to eliminate splashing and standing water. Cooling system shall use R-134a refrigerant. Shall comply with ANSI A117.1 and ADA. Shall be listed by Underwriters' Laboratories to U.S. and Canadian standards. Shall comply with ANSI/NSF 61.

#### Model

**MW8SBF** delivers 8.0 gallons of chilled drinking water per hour.  
**MW12SBF** delivers 12.0 gallons of chilled drinking water per hour.  
**MWSBF** is a non-refrigerated bottle filler. These models satisfy CABO/ANSI A117.1.

#### Standard Features

- > Built-in 100 micron strainer stops particles before they enter the waterway
- > Waterways are Lead-free in Materials & Construction
- > Heavy Duty steel frame
- > Product Certified to NSF/ANSI Standard 61, Annex G (AB1953)
- > High Efficiency cooling tank and coil
- > Refrigerant R-134a

#### Finishes


- > Standard cabinet finish: Brushed Stainless Steel
- > Optional cabinet finish: Regency Bronze

#### Options (at additional cost)

- > Ultra Violet filtration
- > Oasis Green Filtration system

#### Installation

- > Prior to roughing, consult with local, state and federal codes for proper mounting height
- > Shipped with complete instructions and wall mounting bracket
- > Removable front panels allow for easy access to filtration and refrigeration unit

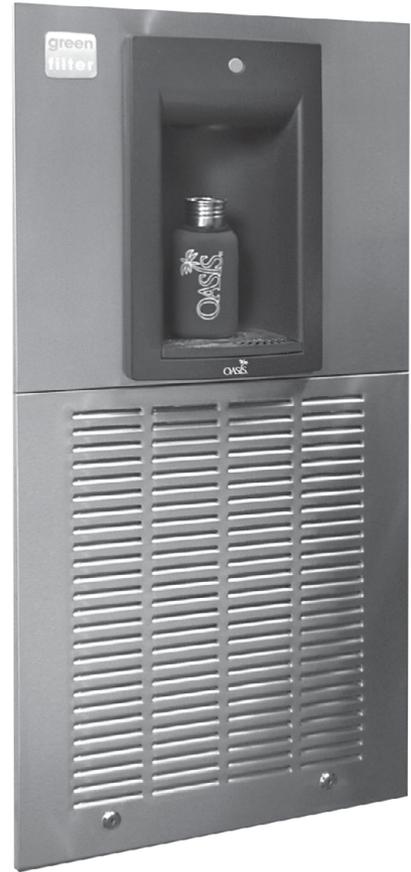

ADA Compliant for reach ranges. These models meet guidelines for children's (ages 5 and up) accessibility providing the floor to button height is less than 40 inches and proper clear floor space is provided for frontal approach.



Components in this fountain are lead free as defined by the Safe Drinking Water Act Amendments of 1986, and the Lead Contamination Control Act of 1988.

Product Certified to NSF/ANSI Standard 61, Annex G (weighted average lead content of  $\leq 0.25\%$ ) and is in compliance with California's Health & Safety Code Section 116875 (commonly known as AB1953).

Models covered by this specification comply with all known Plumbing Codes. Listed by Underwriters' Laboratories to U.S. and Canadian standards.




Certified to NSF/ANSI 61-G

Model	50° F Drinking Water 90° F Ambient Air Temp*		115 Volts, 60 HZ			Cabinet Color Finish	Net Wt. Approx.
	Rated Capacity GPH	Base Rate GPH	Compr. HP	Full Load Amps	Rated Watts		
MWSBF						Yes	26 Lbs.
MW8SBF	8.0	8.0	1/5	4.6	340	Yes	78 Lbs.
MW12SBF	12.0	12.0	1/5	8.7	620	Yes	78 Lbs.

\*Industry Standard Rating Condition 80° F inlet water temperature.

Specifications subject to change without notice

# OASIS™ SPORTS BOTTLE FILLER MODEL MWSBF, MW8SBF, MW12SBF

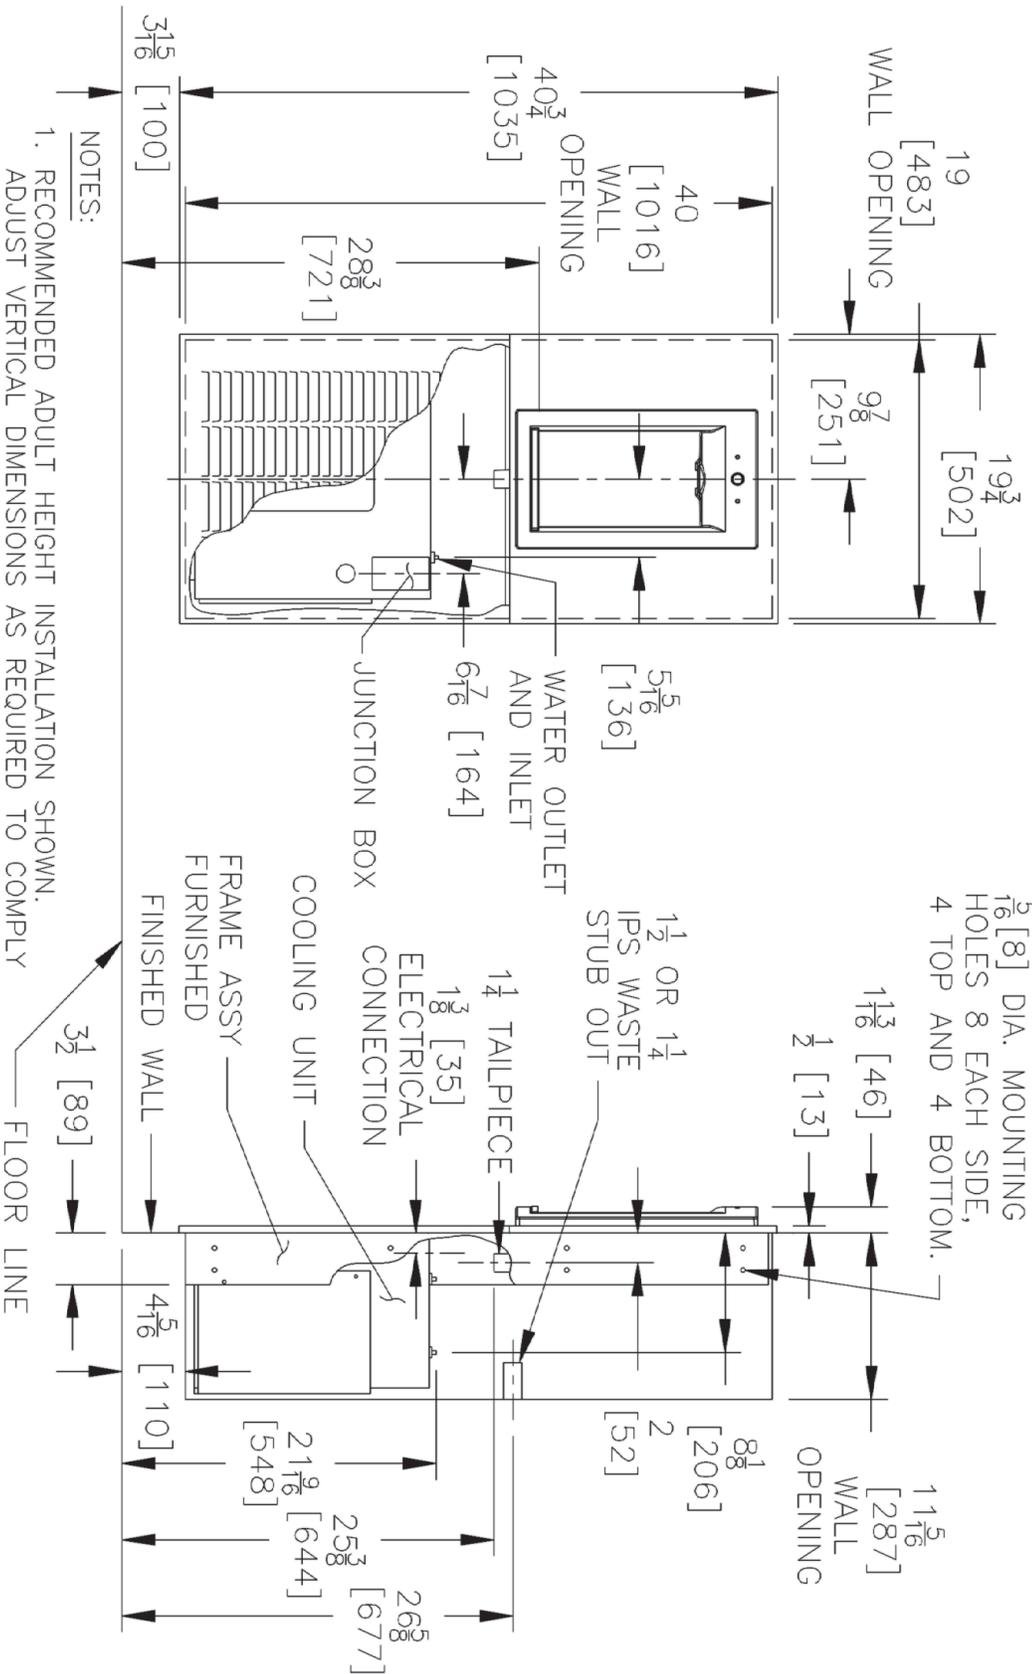

- NOTES:**
1. RECOMMENDED ADULT HEIGHT INSTALLATION SHOWN. ADJUST VERTICAL DIMENSIONS AS REQUIRED TO COMPLY WITH FEDERAL, STATE AND LOCAL CODES.
  2. STOP VALVE, TRAP, PIPE CONNECTOR TO WASTE WASTE LINE NOT PROVIDED.
  3. ALL DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [ ] ARE IN MILLIMETERS.