

# **Aqua Deco**

**Pet Fountain** 

# S P E G F F G A T I O N S

Model A8D1900B-PF is a pet fountain for attachment to the vandal resistant outdoor square drinking fountains. The unit shall be made from an 18 gage, 304 stainless steel bowl mounted into a reinforced brown concrete aggregate receptor. Unit shall be activated by a side mounted self-closing button, by using less than 5 pounds of force, which activates an internally mounted valve with an adjustable stream regulator controlling the water flow. Bubbler shall be polished chrome plated brass with a non-squirt feature and operate on water pressure range of 20 - 105 psig. Unit shall adhere to ANSI/NSF 61, Section 9.

☐ Standard Model: A8D1900B-PF



- Resistant to sunlight, heat, moisture and wear
- 18 gage, 304 stainless steel bowl
- Reinforced concrete with aggregate finish
- Polished chrome plated brass, anti-rotation non-squirt bubbler
- 100 mesh inlet strainer

□ - FRU1 Underground freeze resistant valve
□ "8" Tan concrete aggregate finish (Use model A8D1800B-PF)

# H A N D A N D



Member of U.S. Green Building Council



Recyclable Product



Acorn Aqua™ assumes no responsibility for use of void or suspended data. © Copyright 2009 Acorn Aqua™, City of Industry, CA, A Division of Acorn Engineering Company. Please visit www.acornaqua.com for most current specifications.

Submittal # **A8D1900B-PF** [Sec. D] Rev A 8/1/09








ACORN AQUA 15125 Proctor Avenue City of Industry, CA 91746 U.S.A. Phone 800-591-9360 626-336-4561 Fax 626-855-4894 www.acornaqua.com



# DIMENSIONS

All dimensions are nominal and subject to manufacturer's change without notice. Acorn Aqua™ assumes no responsibility for use of void or suspended data. © 2009 Acorn Aqua™, a Division of Acorn Engineering Company. Please visit www.acornaqua.com for most current specifications.

## ☐ Standard Model: A8D1900B-PF

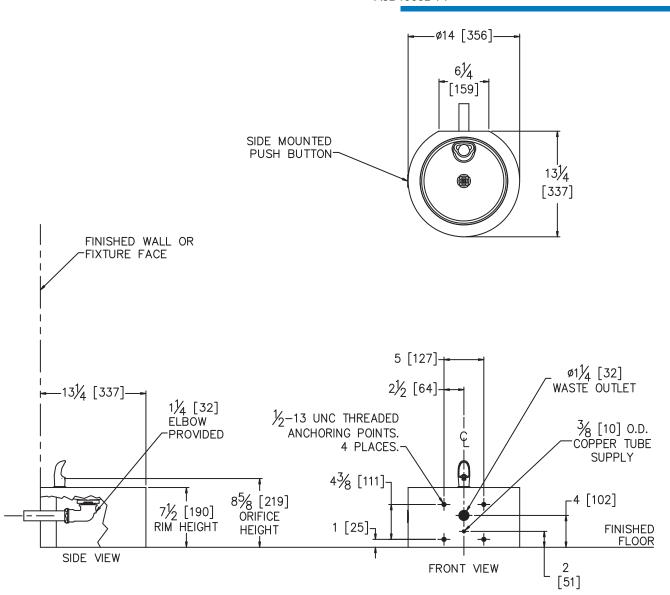

### **GENERAL NOTES:**

- 1. ALL DIMENSIONS ARE IN INCHES [MM].
- 2. STOP VALVE NOT PROVIDED.

### AquaDeco Pet Fountain

Rough-in # **A8D1900B-PF** Rev. B 8/1/09

Five Year Limited Warranty- (Continental United States and Canada Only) The following components are warranted for five years: Compressor, Condenser Coil and Refrigeration Coil. The following components shall only be warranted for a period of one year: Evaporator Can Assembly, Thermostat, Fan Motor, Cartridge, Push Buttons, Compressor Starting Relay/Overload/Capacitor and Activation Linkage. Other parts are warranted for one (1) year from date of installation.

<u>Limited Export Warranty- One (1) year on parts only.</u>

JMMARY L FOR JRING	Company			Aqua
PROVA UFACTI	Model Number & Options  Contact	Title	_Quantity	900 504 0360
SELEC & AP MAN	Signature (Approval for Manufacturing)		Date	800-591-9360 626-336-4561 www.acornaqua.co