


SWIRLFLO FOUNTAIN—BARRIER FREE

ERP-8 ERP-8-1
ERP-2-8 ERP-2-8-1

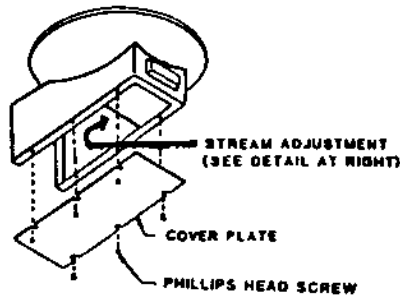

A) OPEN SUPPLY LINE





B) RELEASE AIR FROM LINE BY HOLDING IN PUSH BAR. STEADY STREAM INSURES ALL AIR IS REMOVED.

C) STREAM HEIGHT IS FACTORY SET AT 35 P.S.I. IF SUPPLY PRESSURE VARIES GREATLY FROM THIS, ADJUST SCREW ON REGULATOR.

CLOCKWISE ADJUSTMENT WILL RAISE THE STREAM AND COUNTERCLOCKWISE ADJUSTMENT WILL LOWER THE STREAM.

FOR BEST ADJUSTMENT, STREAM SHOULD HIT BASIN APPROXIMATELY 6" FROM BUBBLER.

D) SECURE COVER PLATE TO FOUNTAIN BODY USING PHILLIPS HEAD SCREWS

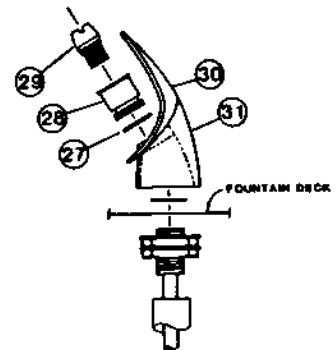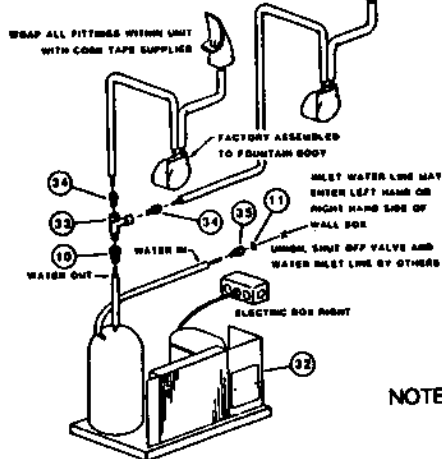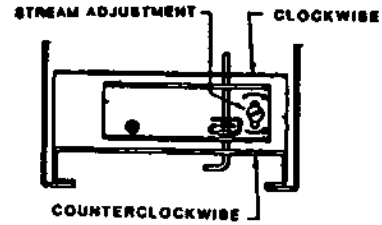


NOTE: FOR CHILLER PACKAGE COMPONENTS

ERP-8 & ERP-2-8
ERP-8-1 & ERP-2-8-1

SEE PAGE 2.6.10
SEE PAGE 2.6.11

ITEM NO.	NO. REQ.	PART NO.	DESCRIPTION
1	2	21804C	PUSH BAR MOUNTING BRACKET
2	4	70283C	SPRING CLIP
3	2	21810C	PUSH BAR ASSEMBLY
4	16	50198C	NYLON BUSHING
5	2	21705C	PUSH ROD CLIP
6	2	70378C	PUSH ROD
7	6	70002C	#10 x .50 HNSM SCREW
8	2	40206000	RETAINER
9	2	70023C	SET SCREW
10	1	70376C	3/8 IPS x 3/16 CONNECTOR
11	1	60291C	SCREEN (WATER INLET)
12	4	40045C	PBM HEX NUT
13	2	61313C	REGULATOR
14	2	10051C	RETAINING NUT
15	2	21806C	REGULATOR ACTIVATING ARM
16	4	70426C	#8-32 x .25 THMS
17	2	70410C	PIVOT ROD
18	2	21844C	PIVOT ROD BRACKET
19	2	70425C	PIVOT ROD
20	2	70208C	10-24 x .37 THTC SCREW
21	2	21803C	REGULATOR MOUNTING BRACKET
22	2	40036C	GRID STRAINER
23	2	40049C	STRAINER BODY
24	2	50074C	RUBBER WASHER 3/16 THICK
25	2	50377C	RUBBER WASHER 3/32 THICK
26	2	40335C	WASTE ARM
27	2	50187C	O-RING
28	2	40177C	ADAPTER
29	2	40322C	ORIFICE ASSEMBLY
30	2	50221C	GUARD
31	2	50168C	PEDESTAL
32	1	ER61359	REFRIGERATION PACKAGE
33	1	70167C	TEE STREET 3/8 MPT
34	2	70099C	CONNECTOR 3/8 x 1/4
35	1	70313C	3/8 FPT TO 1/4 TUBE CONNECTOR

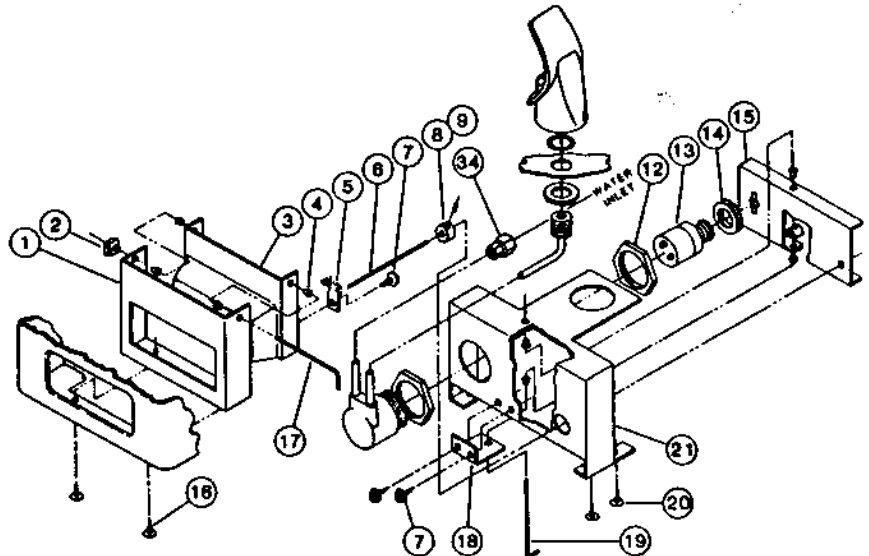

FOR BRONZETONE MODELS...

ITEM NO.	NO. REQ.	PART NO.	DESCRIPTION
3	2	21833C	PUSH BAR ASSEMBLY - BT
22	2	40111C	GRID STRAINER - BT
23	2	40327C	STRAINER BODY - BT
28	2	40358C	ADAPTER - BT
29	2	40066C	ORIFICE ASSEMBLY - BT
31	2	50373C	PEDESTAL - BT