

ELKAY[®]

SPECIFICATIONS

Bi-Level Outdoor Tubular Bottle Filling Station with Pet Fountain Model LK4420BFDB

GENERAL

Pedestal steel bottle filler with textured power coat finish and E-Coat immersion for year-round beauty with minimum maintenance. The E-Coat immersion process coats the outside and inside of the unit for the ultimate in corrosion protection.

Includes pet fountain with slow drainage feature.

Configuration options:

- Single bottle filler in upper location with drinking fountain basin at lower position (Model LK4420BF1UDB)
- Single bottle filler in lower location with drinking fountain basin at upper position (Model LK4420BF1LDB)
- Dual bottle fillers (Model LK4420BF2DB)

NO LEAD DESIGN

This fountain is certified by WQA to lead-free compliance including **NSF/ANSI 61-ANNEX G, AB 1953**.

This model complies with the lead-free definition in the Safe Drinking Water Act of 1986 and Lead Contamination Act of 1988.


CONSTRUCTION

Bottle Filler: Heavy-duty steel construction with rounded design. Laminar flow minimizes splash and allows easy maintenance. Quick fill rate at 1 gallon per minute.

Pushbutton Actuation Mechanism: Self-closing, vandal-resistant pushbutton does not require grasping or twisting.

Inlet Strainer: Easily cleaned in-line strainer screen traps particles of 140 microns or larger before they enter the waterway.

Access Panel: Manufactured of heavy-gauge steel with vandal-resistant screws. Provides access for easy hook-up of all plumbing connections.

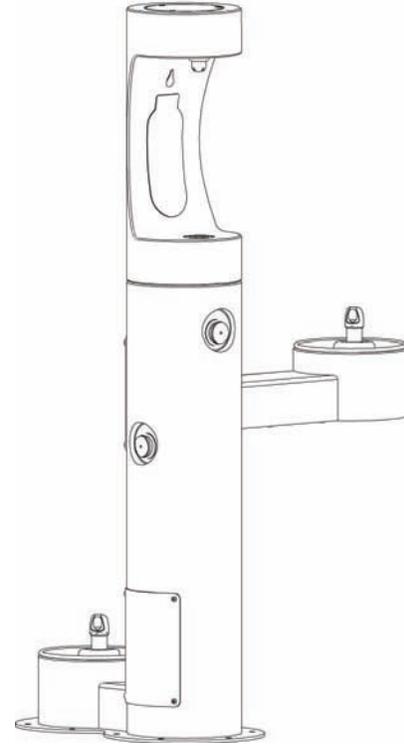

Model LK4420BF1UDB Shown



This model is ADA compliant when properly installed.

Designed to be easily accessible to both physically challenged and able-bodied individuals. Ideally suited for installation in public areas. Model meets state and federal requirements as defined by the Americans with Disabilities Act.

SUGGESTED SPECIFICATIONS

Unit shall be of tubular steel construction. Bottle Filler unit shall include laminar flow and front pushbutton activation. Shall include pet fountain with slow drain feature. Stainless steel contoured basin with vandal-resistant one-piece bubbler, if applicable. Shall comply with ADA guidelines and be certified to lead-free compliance including NSF/ANSI 61, CA 1953 and the Safe Drinking Water Act.

Shipping Weight: 205-255 lbs.

AVAILABLE OPTIONS

Freeze-resistant option - add "FRK" suffix to model number.
Note - Pet Fountain will not be freeze-resistant
(See separate specification sheet.)

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice.

This specification describes an Elkay product with design, quality and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.

Elkay

elkayusa.com

2222 Camden Court
Oak Brook, IL 60523

Printed in U.S.A.
©2011 Elkay

(9/11)

19-29

**Outdoor Bi-Level Tubular
Bottle Filling Station/Fountain with Pet Fountain
Model LK4420BF1UDB**

ELKAY®
ROUGH-IN DIMENSIONS

**MOUNTING INSTRUCTIONS and
PLUMBING CONNECTIONS**



Mount on a smooth, flat, finished surface with adequate support (300 lb. load maximum). Secure unit with ten 3/8" minimum screws or anchor bolts (not provided). Refer to rough-in.

Water supply 3/8" O.D. unplated copper tube. Waste 1-1/2" IPS.

Modified low stream height bubbler for pet fountain.

Trap and service stop not included.

Operating Pressures: Supply water: 20 - 105 psi maximum.

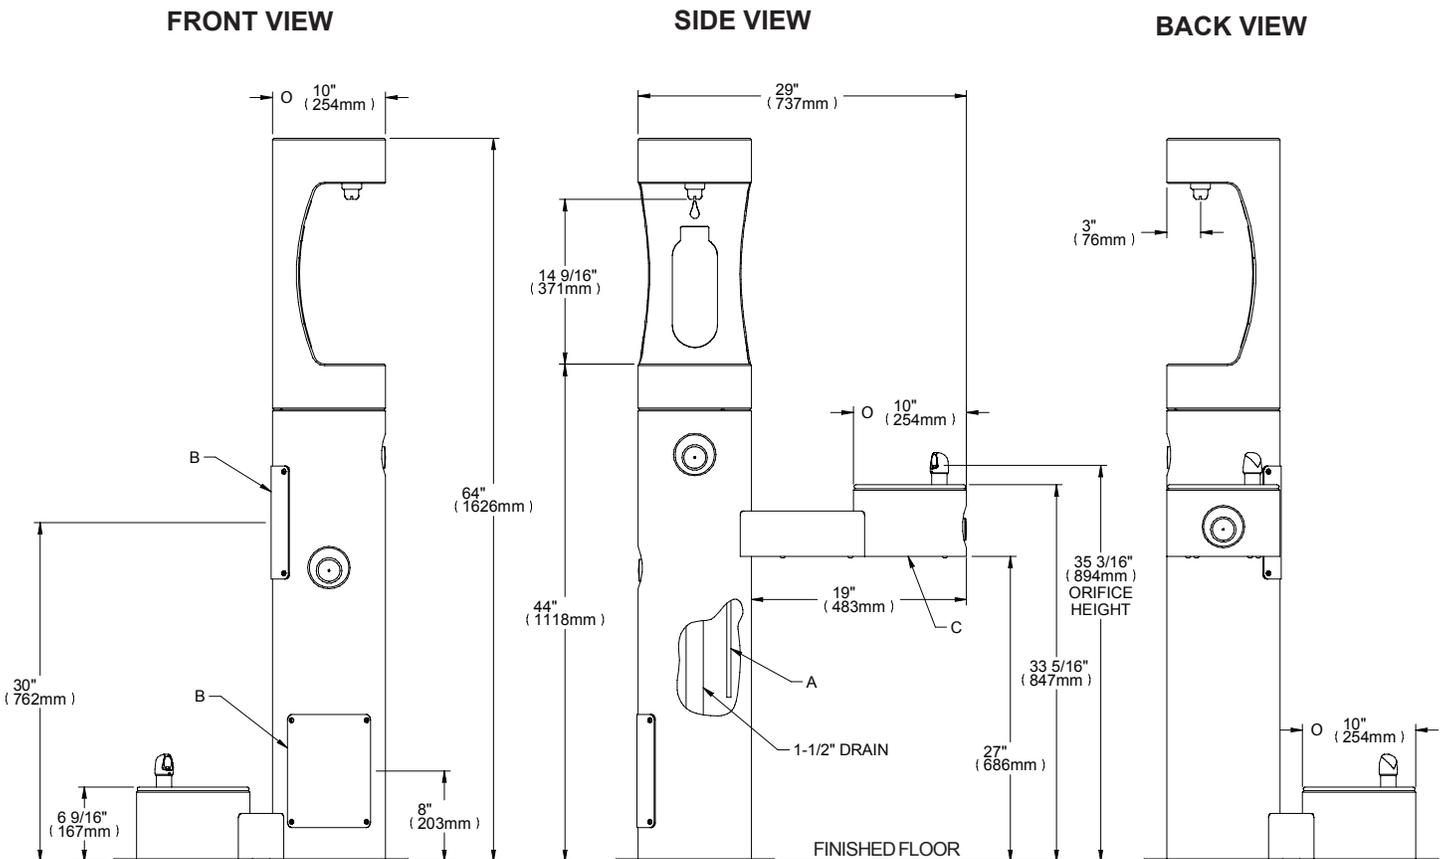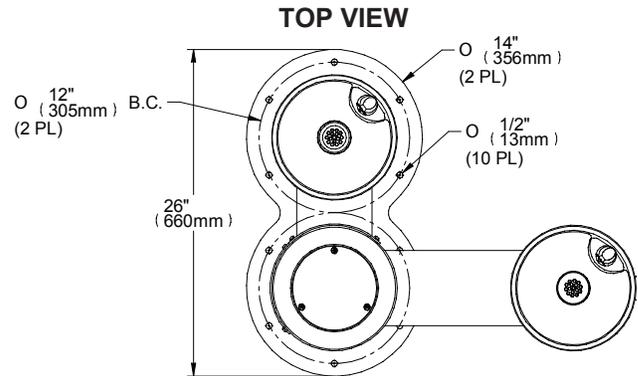

LEGEND

- A = 3/8" O.D. UNPLATED COPPER TUBE CONNECT - SHUT OFF VALVE BY OTHERS**
- B = ACCESS PANEL (8" X 10")**
- C = REMOVABLE BOTTOM COVER**

**Outdoor Bi-Level Tubular
Bottle Filling Station/Fountain with Pet Fountain
Model LK4420BF1LDB**

ELKAY®
ROUGH-IN DIMENSIONS

**MOUNTING INSTRUCTIONS and
PLUMBING CONNECTIONS**


Mount on a smooth, flat, finished surface with adequate support (300 lb. load maximum). Secure unit with ten 3/8" minimum screws or anchor bolts (not provided). Refer to rough-in.

Water supply 3/8" O.D. unplated copper tube. Waste 1-1/2" IPS.

Modified low stream height bubbler for pet fountain.

Trap and service stop not included.


Operating Pressures: Supply water: 20 - 105 psi maximum.

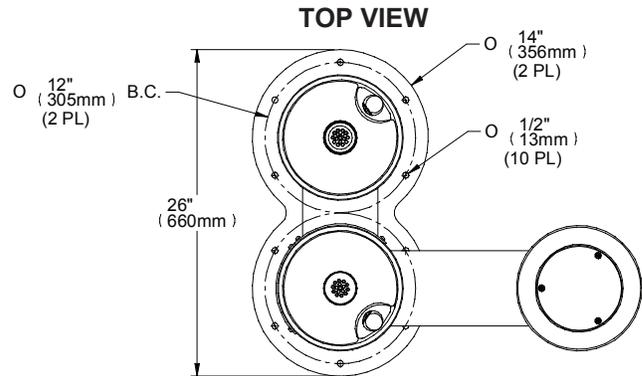

FRONT VIEW

SIDE VIEW

BACK VIEW

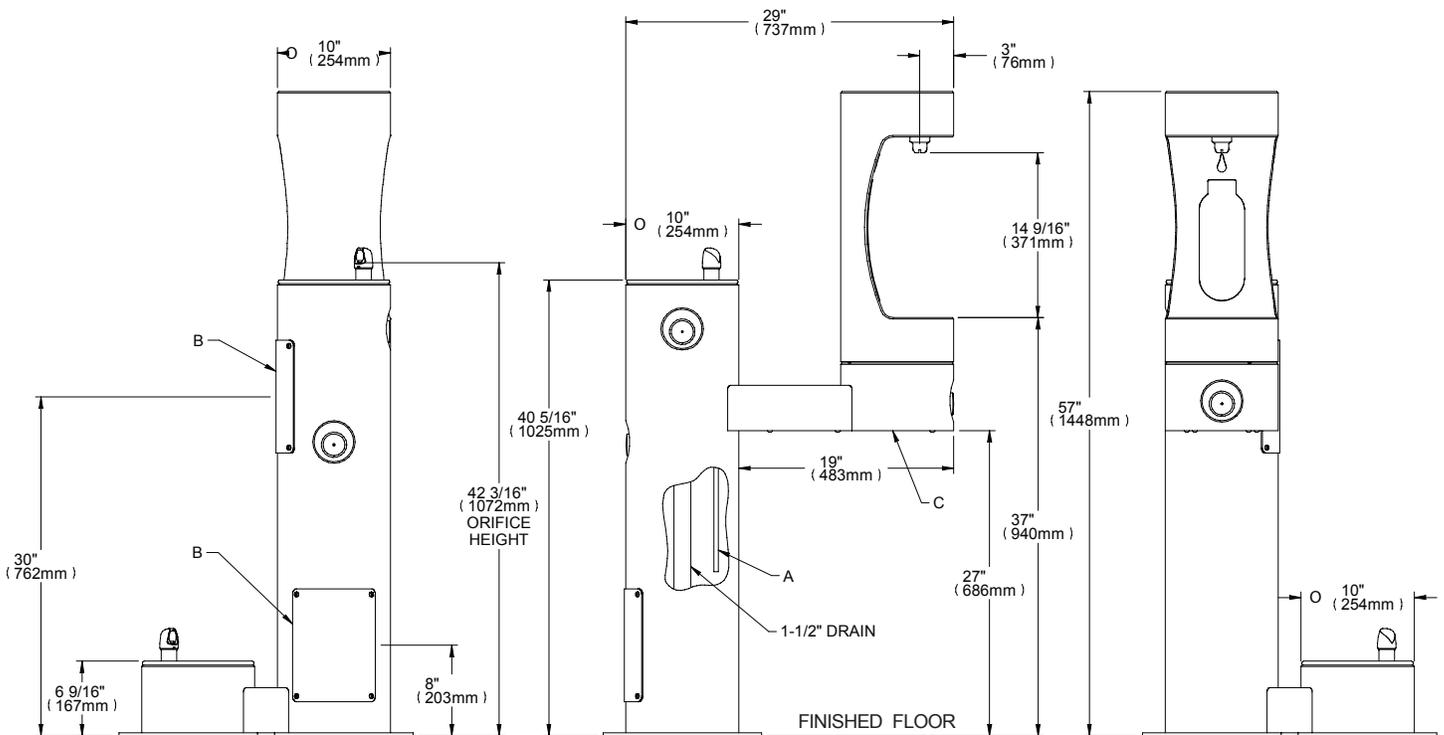

LEGEND

A = 3/8" O.D. UNPLATED COPPER TUBE CONNECT - SHUT OFF VALVE BY OTHERS

B = ACCESS PANEL (8" X 10")

C = REMOVABLE BOTTOM COVER

**Outdoor Bi-Level Tubular
Bottle Filling Station with Pet Fountain
Model LK4420BF2DB**

ELKAY®
ROUGH-IN DIMENSIONS

**MOUNTING INSTRUCTIONS and
PLUMBING CONNECTIONS**

Mount on a smooth, flat, finished surface with adequate support (300 lb. load maximum). Secure unit with ten 3/8" minimum screws or anchor bolts (not provided). Refer to rough-in.


Water supply 3/8" O.D. unplated copper tube. Waste 1-1/2" IPS.

Modified low stream height bubbler for pet fountain.


Trap and service stop not included.

Operating Pressures: Supply water: 20 - 105 psi maximum.


TOP VIEW

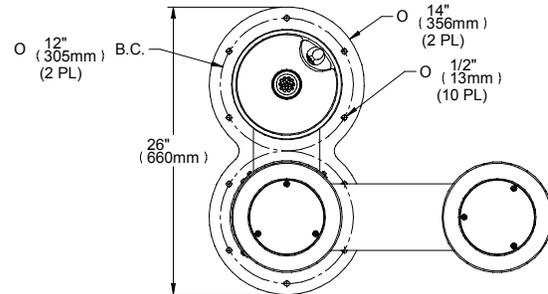


FRONT VIEW

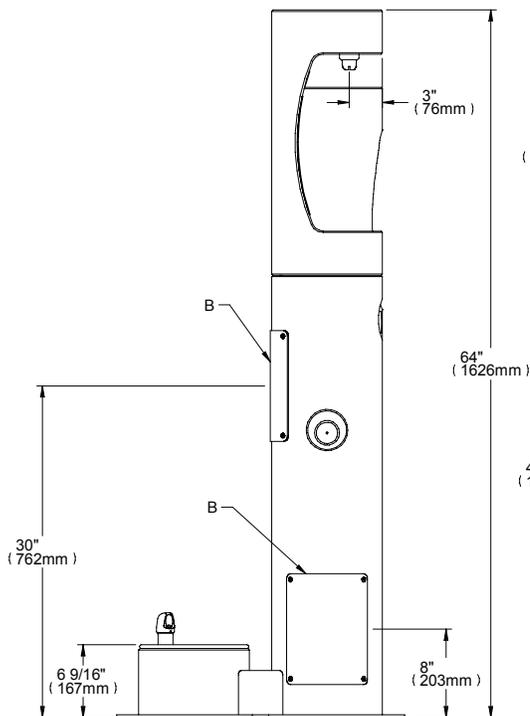

BACK VIEW

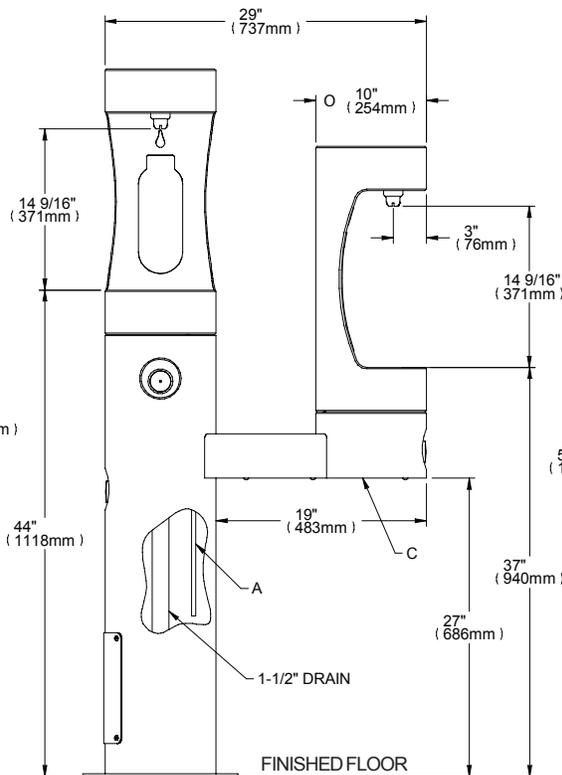

SIDE VIEW

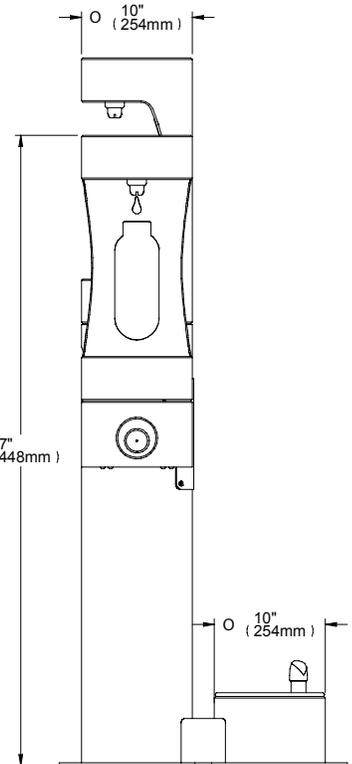

LEGEND

A = 3/8" O.D. UNPLATED COPPER TUBE CONNECT - SHUT OFF VALVE BY OTHERS

B = ACCESS PANEL (8" X 10")

C = REMOVABLE BOTTOM COVER