

AquaDesign

Barrier Free Bi-Level, Wall Mounted Drinking Fountain

SUGGESTED SPECIFICATIONS

Model A1C2500B-BP6 is a wall mounted, vandal resistant bi-level drinking fountain. Bowls are made from 18 gage, 304 stainless steel bowls and are mounted into green powder coated, heavy duty, 11 gage galvanized steel support arms that are mounted onto a steel powder coated back panel. ADA compliant pushbutton requires less than 5 pounds push to activate internally mounted valves. Valves have adjustable stream regulators which control the water flow. Bubblers shall be polished chrome plated brass with non-squirt features and operate on water pressure range of 20-105 psig. Unit shall adhere to ANSI/NSF 61, Section 9, ANSI A117.1. Fixture meets ADA and ADA standing person drinking fountain accessibility requirements when mounted correctly. Alternatively, fixture may be mounted to comply with TAS or TAS 11-15 accessibility requirements.



■ ADA & ADA standing person, TAS or TAS 11 - 15 Compliant (when properly installed)

- Resistant to sunlight, heat, moisture and wear
- 18 gage, 304 stainless steel bowl
- Heavy duty, 11 gage galvanized steel arm, corrosion and scratch resistant finish
- Polished chrome plated brass, anti-rotation non-squirt bubbler
- 100 mesh inlet strainer
- P-trap, 1-1/4" O.D.
- Vandal resistant bottom galvanized steel plate and screws
- Mounting plate
- Back panel

A C C E S S O R I E S (additional cos

"7"

□ -CSC Concealed support carrier□ -FRA4 Freeze resistant valve system

☐ -RBL Reverse bi-level☐ "S" Polished stainless steel,

lead-free bubbler (Use model A1C2500**S**-BP6)

☐ "4" Stainless steel

(Use model A1C2400B-BP6)

"6" Firehouse red powder coated finish

(Use model A1C2**6**00B-BP6)

Alpine blue powder coated finish (Use model A1C2700B-BP6)

Custom color finishes available upon request



Member of U.S. Green Building Council



Recyclable Product



Acom Aqua™ assumes no responsibility for use of void or suspended data. © Copyright 2009 Acom Aqua™. City of Industry, CA, A Division of Acom Engineering Company. Please visit www.acornaqua.com for most current specifications.

Submittal # **A1C2500B-BP6** [Sec. B] Rev. F 05/26/11












ACORN AQUA 15125 Proctor Avenue City of Industry, CA 91746 U.S.A. Phone 800-591-9360 626-336-4561 Fax 626-855-4894 www.acornaqua.com



All dimensions are nominal and subject to manufacturer's change without notice. Acorn Aqua™ assumes no responsibility for use of void or suspended data. © 2009 Acorn Aqua™, a Division of Acorn Engineering Company. Please visit www.acornaqua.com for most current specifications.

Standard Model: A1C2500B-BP6

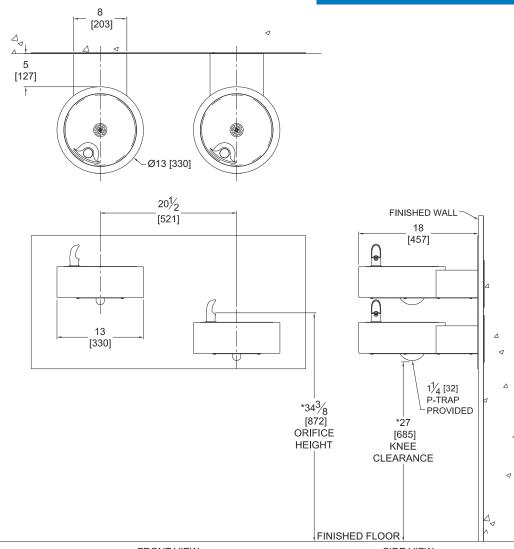

FRONT VIEW

SIDE VIEW

GENERAL NOTES:

- 1. ALL DIMENSIONS ARE IN INCHES [MM].
- *2. DIMENSIONS SHOWN ARE FOR RECOMMENDED ADULT HEIGHT. ADJUST VERTICAL DIMENSIONS AS NECESSARY TO COMPLY WITH FEDERAL, STATE, & LOCAL CODES.
- 3. STOP VALVE NOT PROVIDED.

AquaDesign Barrier Free Bi-Level, Wall Mounted Drinking Fountain

Rough-in # A1C2500B-BP6 Rev. F 05/26/11

Five Year Limited Warranty- (Continental United States and Canada Only) The following components are warranted for five years: Compressor, Condenser Coil and Refrigeration Coil. The following components shall only be warranted for a period of one year: Evaporator Can Assembly, Thermostat, Fan Motor, Cartridge, Push Buttons, Compressor Starting Relay/Overload/Capacitor and Activation Linkage. Other parts are warranted for one (1) year from date of installation. Limited Export Warranty- One (1) year on parts only.

ריז
ᅩ
z
_
m
=
_
=
_
O
>
q,
ш
=
_
_
-
Œ
MANUFACTURIN
2
_

MMAR FOR RING	Company	Aqua
N SUN OVAL ACTUF	Model Number & OptionsQuantity	TM
APPR ANUF/	ContactTitle	800-591-9360
SELE 8,	Signature (Approval for Manufacturing) Date	626-336-4561 www.acornaqua.com