

AquaDesign

Barrier Free, Bi-Level, Pedestal Mounted Drinking Fountain

Model ABC2500B is a barrier free pedestal mounted, vandal resistant, bi-level round drinking fountain made from 18 gage, 304 stainless steel bowls mounted into a green powder coated, heavy duty, 11 gage galvanized welded steel pedestal. Unit shall be activated by front mounted self-closing buttons, by using less than 5 pounds of force, which activates internally mounted valves with adjustable stream regulators controlling the water flow. Bubblers shall be polished chrome plated brass with non-squirt features and operate on water pressure range of 20-105 psig. Unit shall adhere to ANSI A117.1 and Americans with Disabilities Act of 1990 frontal approach and protruding objects requirements, Adult ADA parallel and frontal approach and ANSI/NSF 61, Section 9.



■ Resistant to sunlight, heat, moisture and wear

- 18 gage, 304 stainless steel bowls
- Heavy duty, 11 gage galvanized welded steel, corrosion and scratch resistant finish
- Polished chrome plated brass, anti-rotation non-squirt bubblers
- 100 mesh inlet strainer
- Access door, heavy duty steel, vandal resistant
- Vandal resistant galvanized steel bottom plate



Member of U.S. Green Building Council







□ - CH30 □ - FRU2 □ - FS □ - HB1 □ - HB2 □ - HB3 🗆 - IGM 🗆 - JF1 □ - JF2 🗆 - PF □ "S" □ "4" □ "6"

Freeze resistant valve Foot spray Hose bibb, compression, with hose threaded outlet/VB Hose bibb, loose key, with hose threaded outlet/VB Hose bibb, loose key, vandal resistant, hose threaded outlet/VB In-ground 14" mounting Jug filler, plain end with self-closing valve Jug filler, recessed, plain end with self-closing valve

Child height, 30" bubbler height

Pet fountain receptor

Polished stainless steel. lead-free bubbler (Use model ABC2500S) All stainless steel

(Use model ABC2400B) Firehouse red powder coated finish (Use model ABC2600B)

Alpine blue powder coated finish (Use model ABC2700B)

Custom color finishes available upon request

Acorn Aqua™ assumes no responsibility for use Acom Aqua — Sasanies no responsibility for of void or suspended data. © Copyright 2009 Acom Aqua M. City of Industry, CA, A Division of Acom Engineering Company. Please visit www.acornaqua.com for most current specifications

Submittal # ABC2500B [Sec. B] Rev. D 8/1/09












ACORN AQUA 15125 Proctor Avenue City of Industry, CA 91746 U.S.A. Phone 800-591-9360 626-336-4561 Fax 626-855-4894 www.acornagua.com



All dimensions are nominal and subject to manufacturer's change without notice. Acorn Aqua™ assumes no responsibility for use of void or suspended data. © 2009 Acorn Aqua™, a Division of Acorn Engineering Company. Please visit www.acornaqua.com for most current specifications.

☐ Standard Model: ABC2500B

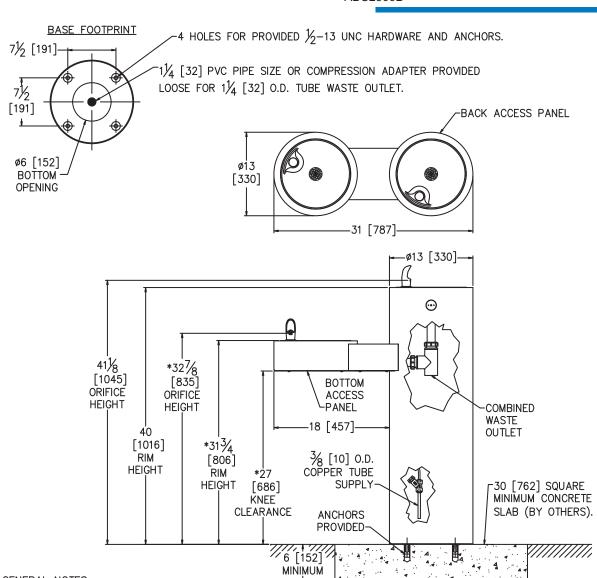

GENERAL NOTES:

- 1. ALL DIMENSIONS ARE IN INCHES [MM].
- *2. STANDARD ADULT HEIGHT MODEL SHOWN. OPTIONAL -CH30 CHILD HEIGHT MODEL AVAILABLE.
- 3. STOP VALVE NOT PROVIDED.

AquaDesign Barrier Free, Bi-Level, Pedestal Mounted Drinking Fountain

Rough-in # **ABC2500B** Rev. B 8/1/09

<u>Five Year Limited Warranty-</u> (Continental United States and Canada Only) The following components are warranted for five years: Compressor, Condenser Coil and Refrigeration Coil. The following components shall only be warranted for a period of one year: Evaporator Can Assembly, Thermostat, Fan Motor, Cartridge, Push Buttons, Compressor Starting Relay/Overload/Capacitor and Activation Linkage. Other parts are warranted for one (1) year from date of installation. Limited Export Warranty- One (1) year on parts only.

FOR	Cor
ON SUMIN ROVAL F RACTURI	Мо
	Cor
SELEC & AP MAN	Sig (Ap

SING SING	Company			Aqua
ACTUR	Model Number & Options		_Quantity	TM
NOF	Contact	Title		800-591-9360
Ž	Signature (Approval for Manufacturing)		Date	626-336-4561 www.acornaqua.com