



Water Coolers



FREE-STANDING HEAVY DUTY PLF7P, PLF13P, PLF13PL

Models

- PLF7P is ultraquiet and delivers 7 gph of chilled drinking water.
- PLF13P delivers 13.3 gph of chilled drinking water.
- PLF13PL is 30 5/16" high for the convenience of children, and serves 13.3 gph of chilled drinking water.

Standard Features

- > Waterways are Lead-Free in Materials & Construction
- > Dial-A-Drink® Bubbler
- > Stainless Steel Top
- > Heavy-Gauge Steel Cabinet With Separate Base
- > High-Efficiency Cooling Tank and Coil
- > Refrigerant R-134a
- > Product Certified to NSF/ANSI Standard 61, Annex G (AB1953)
- > Limited year Warranty

Finishes

- > Standard Cabinet Finish: Sandstone powder coated paint on galvanized steel
- > Optional finishes (at additional cost): Stainless Steel and optional powder coated finishes.

Accessories

- > Glass Filler - Push Handle (029603-004)
- > Glass Filler - Push Back (029603-005)
- > Glass Filler - Push Down (029603-005)
- > Kit 029440-001 is required for Field Installation for the above glass fillers
- > Foot pedal operated

Installation

- > Prior to roughing-in consult with local, state, and federal codes
- > Shipped with complete instructions



Components in these water coolers are lead free as defined by the Safe Water Act Amendments of 1986, and the Lead Contamination Control Act of 1988.

Limited 5-Year Warranty (Continental limits of the United States and Canada): Five years on the sealed refrigeration system and most component parts. Detailed warranty certificate enclosed with each water cooler; sample available upon request.

Export Warranty: One year on sealed refrigeration system and most components parts. Four-year replacement contract on sealed refrigeration system. Detailed warranty certificate enclosed with each drinking fountain; sample copy available upon request.

Product Certified to NSF/ANSI Standard 61, Annex G (weighted average lead content of <=0.25%) and is in compliance with California's Health & Safety Code Section 116875 (commonly known as AB1953).

Models covered by these specifications comply with all known Plumbing Codes. Listed by Underwriters' Laboratories to U.S. and Canadian Safety Standards.






Certified to
NSF/ANSI 61-G

Model	50° F Drinking Water 90° F Ambient Air Temp*			Hot 'N Cold™ Model	115 Volts, 60 HZ			Glass Filler Acc. Option	Cabinet Color Finish	Net Wt. Approx.
	Rated Capacity GPH	Base Rate GPH	Pre-Cooler		Compr. HP	Full Load Amps	Rated Watts			
PLF7P	7.0	3.5	Yes	No	1/8	2.5	200	Yes	Yes	73 Lbs.
PLF13P	13.3	7.0	Yes	No	1/5	4.7	300	Yes	Yes	80 Lbs.
PLF13PL	13.3	7.0	Yes	No	1/5	4.7	300	Yes	Yes	70 Lbs.

*Industry Standard Rating Condition 80° F inlet water temperature.

Specifications subject to change without notice

OASIS™ FREE-STANDING HEAVY DUTY WATER COOLER MODELS PLF7P, PLF13P, PLF13PL

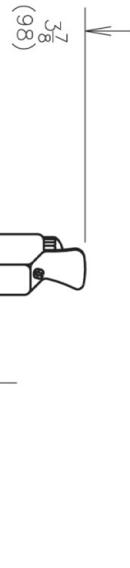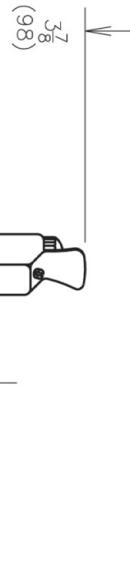

ALL DIMENSIONS ARE IN INCHES.
DIMENSIONS IN PARENTHESES ()
ARE IN MILLIMETERS.

ALLOW 4" (102) BETWEEN REAR OF WATER
COOLER AND WALL FOR VENTILATION.

REAR VIEW

15(381) SQ.



REAR VIEW

15(381) SQ.

