

# AquaContour

## **Barrier Free, Wall Mounted Drinking Fountain**

Model A151400B is a wall mounted, vandal resistant drinking fountain made from 18 gage, 304 stainless steel with a brushed finish. Unit shall be activated by a self-closing, frontal push pad, by using less than 5 pounds of force, which activates an internally mounted valve with an adjustable stream regulator controlling the water flow. Bubbler shall be polished chrome plated brass with a non-squirt feature and operate on water pressure range of 20-105 psig. Unit shall have a uniquely designed, two-piece contoured bowl with P-trap integral to the unit. Unit shall adhere to ANSI A117.1 and Americans with Disabilities Act of 1990 frontal approach and protruding objects requirements, Child ADA parallel and frontal approach and ANSI/NSF 61, Section 9.



### ■ Both Child and Adult ADA Compliant (when properly installed)

- 18 gage, 304 stainless steel
- Polished chrome plated brass, anti-rotation non-squirt bubbler
- 100 mesh inlet strainer
- Vandal resistant screws
- Integral P-trap
- Mounting plate with hardware

Member of U.S. Green Building Council





Water











□ - AD1 Access door

□ - AP1 Access panel for a single fountain

☐ - BP2 Back panel for single box contoured fountain

□ - CSC Concealed support carrier

"F" Flexible bubbler (Use model A151400F)

□ - FRA1 Freeze resistant valve

🗆 - HP High polished stainless steel

□ - MF1 Mounting frame for a single fountain

□ "S" Polished stainless steel, lead-free bubbler (Use model A151400S)

□ - WF3 1250 gallon capacity, NSF 42+53 1 micron lead reduction in-line filter

Dark bronze finish (Use model A151200B)

Gold finish (high polished only) (Use model A151300B)

Custom color finishes available upon request.

Acorn Aqua™ assumes no responsibility for use Acom Aqua — Sasanies no responsibility for of void or suspended data. © Copyright 2009 Acom Aqua M. City of Industry, CA, A Division of Acom Engineering Company. Please visit www.acornaqua.com for most current specifications

**Submittal # A151400B** [Sec. B] Rev. D 8/1/09










**ACORN AQUA** 15125 Proctor Avenue City of Industry, CA 91746 U.S.A. Phone 800-591-9360 626-336-4561 Fax 626-855-4894 www.acornagua.com




## DIMENSIONS

All dimensions are nominal and subject to manufacturer's change without notice. Acorn Aqua™ assumes no responsibility for use of void or suspended data. © 2009 Acorn Aqua™, a Division of Acorn Engineering Company. Please visit *www.acornaqua.com* for most current specifications.

☐ Stainless Steel Model: A151400B



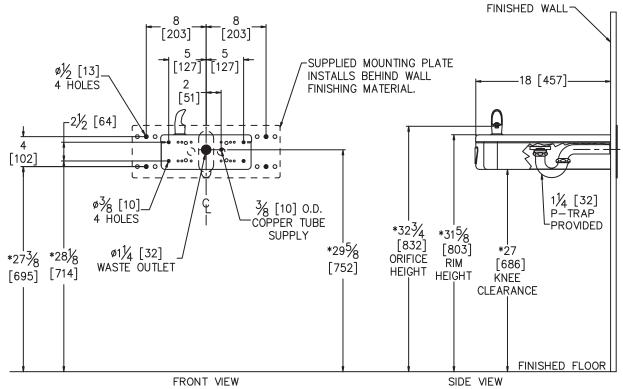

### **GENERAL NOTES:**

- 1. ALL DIMENSIONS ARE IN INCHES [MM].
- \*2. DIMENSIONS SHOWN ARE FOR RECOMMENDED ADULT HEIGHT. ADJUST VERTICAL DIMENSIONS AS NECESSARY TO COMPLY WITH FEDERAL, STATE, & LOCAL CODES.
- 3. STOP VALVE NOT PROVIDED.

AquaContour Barrier Free, Wall Mounted Drinking Fountain

Rough-in # **A151400B** Rev. B 8/1/09

Five Year Limited Warranty- (Continental United States and Canada Only) The following components are warranted for five years: Compressor, Condenser Coil and Refrigeration Coil. The following components shall only be warranted for a period of one year: Evaporator Can Assembly, Thermostat, Fan Motor, Cartridge, Push Buttons, Compressor Starting Relay/Overload/Capacitor and Activation Linkage. Other parts are warranted for one (1) year from date of installation.

<u>Limited Export Warranty- One (1) year on parts only.</u>

ď	~	'n
₹	FOR	ž
₹	۳	ď
SUMMAR	APPROVAL	MANUFACTURING
z	6	ပ္
0	Ř	重
CTION	ᇤ	물
	3	⊴
긂	ಂಠ	2

Company			Aqua
Model Number & Options		Quantity	TM
Contact	Title		800-591-9360
Signature (Approval for Manufacturing)		Date	626-336-4561 www.acornaqua.com