

AquaContour

Barrier Free, Bi-Level, Wall Mounted Drinking Fountain

S D E G I F I G A T I O N S

Model A152400B is a wall mounted, vandal resistant bi-level drinking fountain made from 18 gage, 304 stainless steel with a brushed finish. Unit shall be activated by self-closing, frontal push pads, by using less than 5 pounds of force, which activates internally mounted valves with adjustable stream regulators controlling the water flow. Bubblers shall be polished chrome plated brass with non-squirt features and operate on water pressure range of 20-105 psig. Unit shall have a uniquely designed, two-piece contoured bowls with P-traps integral to the unit. Unit shall adhere to ANSI A117.1 and Americans with Disabilities Act of 1990 frontal approach and protruding objects requirements, Child ADA parallel and frontal approach and ANSI/NSF 61, Section 9.

☐ Stainless Steel Model: A152400B



■ Both Child and Adult ADA Compliant (when properly installed)

- 18 gage, 304 stainless steel
- Polished chrome plated brass, anti-rotation non-squirt bubbler
- 100 mesh inlet strainer
- Vandal resistant screws
- Integral P-trap
- Mounting plate with hardware
- Back panel

CCESSORIES (additional co

☐ - AP2 Access panel for a dual fountain

□ - CSC Concealed support carrier

□ "F" Flexible bubblers (Use model A152400F)

☐ - FRA4 Freeze resistant valve system

□ - HP High polished stainless steel

□ - MF2 Mounting frame for a dual fountain

☐ - RBL Reverse bi-level

□ "S" Polished stainless steel, lead-free bubbler (Use model A152400S)

□ - SK3 Skirt kit, stainless steel, for upper unit

☐ - WF1 1500 gallon capacity, NSF 42+53,

1 micron lead reduction filter

□ "2" Dark bronze finish (Use model A152**2**00B)

☐ "3" Gold finish (high polished only) (Use model A152300B)

Custom color finishes available upon request



Member of U.S. Green Building Council



Recyclable Product



Acom Aqua™ assumes no responsibility for use of void or suspended data. © Copyright 2009 Acom Aqua™, City of Industry, CA, A Division of Acom Engineering Company. Please visit www.acornaqua.com for most current specifications.

Submittal # **A152400B** [Sec. B] Rev. E 8/1/09












ACORN AQUA 15125 Proctor Avenue City of Industry, CA 91746 U.S.A. Phone 800-591-9360 626-336-4561 Fax 626-855-4894 www.acornaqua.com



DIMENSIONS

All dimensions are nominal and subject to manufacturer's change without notice. Acorn Aqua™ assumes no responsibility for use of void or suspended data. © 2009 Acorn Aqua™, a Division of Acorn Engineering Company. Please visit *www.acornaqua.com* for most current specifications.

☐ Stainless Steel Model: A152400B

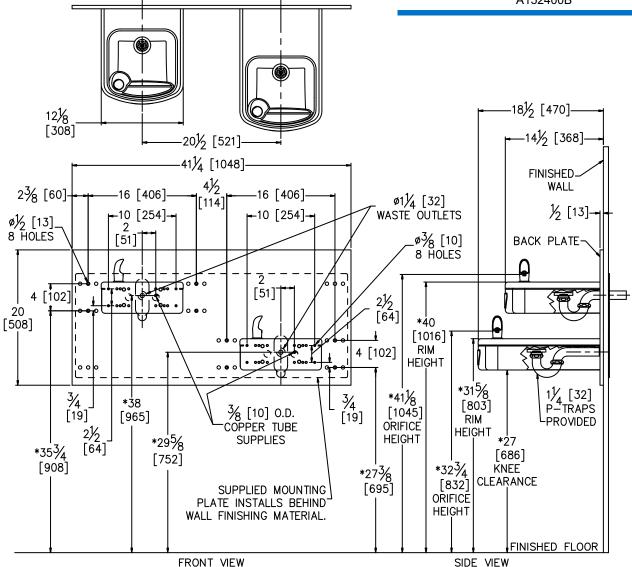

GENERAL NOTES:

- 1. ALL DIMENSIONS ARE IN INCHES [MM].
- *2. DIMENSIONS SHOWN ARE FOR RECOMMENDED ADULT HEIGHT. ADJUST VERTICAL DIMENSIONS AS NECESSARY TO COMPLY WITH FEDERAL, STATE, & LOCAL CODES.
- 3. STOP VALVE NOT PROVIDED.

AquaContour Barrier Free, Bi-Level, Wall Mounted Drinking Fountain

Rough-in # **A152400B** Rev. C 8/1/09

Five Year Limited Warranty- (Continental United States and Canada Only) The following components are warranted for five years: Compressor, Condenser Coil and Refrigeration Coil. The following components shall only be warranted for a period of one year: Evaporator Can Assembly, Thermostat, Fan Motor, Cartridge, Push Buttons, Compressor Starting Relay/Overload/Capacitor and Activation Linkage. Other parts are warranted for one (1) year from date of installation.

<u>Limited Export Warranty- One (1) year on parts only.</u>

- W (1)	
a = 0	
-0-	
≥0Z	
= - ~	
≥ ⊣뜨	
요절단	
(A > -	
W 5 1.	
ZOZ	
= = =	
OKE	
256	
당특물	
U = =	
III S. at	
ᆜᇮᅙ	

SING	Company			-l Aqüä
CTU	Model Number & Options_		Quantity	- TM
NUFA	Contact	Title		800-591-9360
Ψ	Signature (Approval for Manufacturing)		_Date	626-336-4561 www.acornaqua.com